



HTTP://WWW.VECO.COM.CN

佛山宏立電子有限公司
Foshan Vanson Electronics Co.,Ltd.

168, Industry Development Zone, Shitou Chun, Lanshi Zhen, Foshan
Guangdong, CHINA 528041 E-mail: vecof@fs165.com

廣東省佛山市瀾石鎮石頭村工業開發區 168 號 郵編: 528041

TEL: 0757-8381 5788

FAX: 0757-8381 8577

Specification

規格書

品名 (Product Name)	揚聲器 (Speaker)
料號 (Model No.)	P40KLS08

Revision History			
Version	Date	Description	Author
V1.0	2002/06/26		ZXC
V1.1	2005/09/13	Modify Resonant Frequency	LYH

核準 (Approval)		
審查 (Check)		
制作 (Author)	龍英華	

Foshan Vanson Electronics Co., Ltd.

168, Industrial Development Zone, Shitou Chun, Lanshi Zhen, Foshan, Guangdong, CHINA

TEL: +86-757- 8381 5788 FAX: +86-757- 8381 8577 E-mail: vecof@fs165.com

1.	MODEL:	40KLS08	
2	Dimension & Weight	Outer Diameter 22x40	Face side Dimension 21X38 mm
		Baffle Opening 21X38 mm	
		Height Refer to drawing	Weight 9.6 Grams
3	Magnet	Materials Rare Earth	Size 18.5x9.6ϕ x2.5 mm
4.	Nominal Impedance	8 Ω $\pm$ 15 %, At 1500 Hz.	
5.	Power Rating	Normal 2.0 Watts	Maximum 3.0 Watts Sine Wave.
		Normal Watts	Maximum Watts Square Wave.
6.	Resonant Frequency	500 $\pm$ 20 % Hz.	
7.	Output Sound Pressure Level (S.P.L.)	86 $\pm$ 3 db/ 1.0 Watt $\cdot$ 0.5 Meter	
		Average at 800, 1000, 1200, 1500 Hz.	
8.	Frequency Range	300 $\sim$ 20000 Hz. Average SPL – 10 db.	
9.	Distortion	5 % Maximum At 1000 Hz. 1.0 W.	
10	Abnormal Sound test	Must be Normal Tested By 4.0 Volts. Sine Wave.	
11	Load Test	White Noise with weighted filter 4.0 Volts. (RMS.) 24 Hours.	
12	Polarity	Diaphragm shall move Forward while Apply a Positive DC Signal to the " + " or " " Marked " Terminal.	

Above Measuring condition under temperature : 25~35℃ R.H. 25 ~75%. According to standard GB/T9396-1996

Mechanical and vibration test

13	High Temperature	+ 60 $\pm$ 2 °C	Humidity Random for 24 Hours. (GB2423.2-81)
14	Low Temperature	– 25 $\pm$ 2 °C	Humidity Random for 24 Hours. (GB2423.1-81)
15	Humidity	+ 40 $\pm$ 2 °C	Relative Humidity (RH) 90 ~ 95 % 96 Hours.
16	Vibration	Frequency 30 $\pm$ 15 Hz, Amplitude 1.5 mm for 3 Hours. (GB11606.8-89)	
17	Drop test	75 CM free falling on Concrete floor, 10 times. (GB2423. 8-81)	

After test leave speakers at room temperature for 1 hour, SPL shall not deviate by $\pm$ 3 db from pre-test


18	Temperature Cycle test	– 25 ~ + 60 °C	4 Cycles Temperature test. (GB5170.18-87)
----	------------------------	----------------	---

After test leave speakers at room temperature for 1 hour, SPL shall not deviate by $\pm$ 4 db from pre-test Measurement, and meet above spec. item 6. 7. 8. 9. 10.

Please refer to next pages for more detailed testing method.

Test method and User precaution.

1. Characteristics measured according to standard GB/T 9396-1996
 - 1.1 Except other specified, measuring are under Temperature 25~35°C R.H. 25 ~75%
 - 1.2. Judgement condition Temperature 20 ±2 R.H. 63~67%
2. Output Sound Pressure Level (S.P.L.) and distortion testing setup

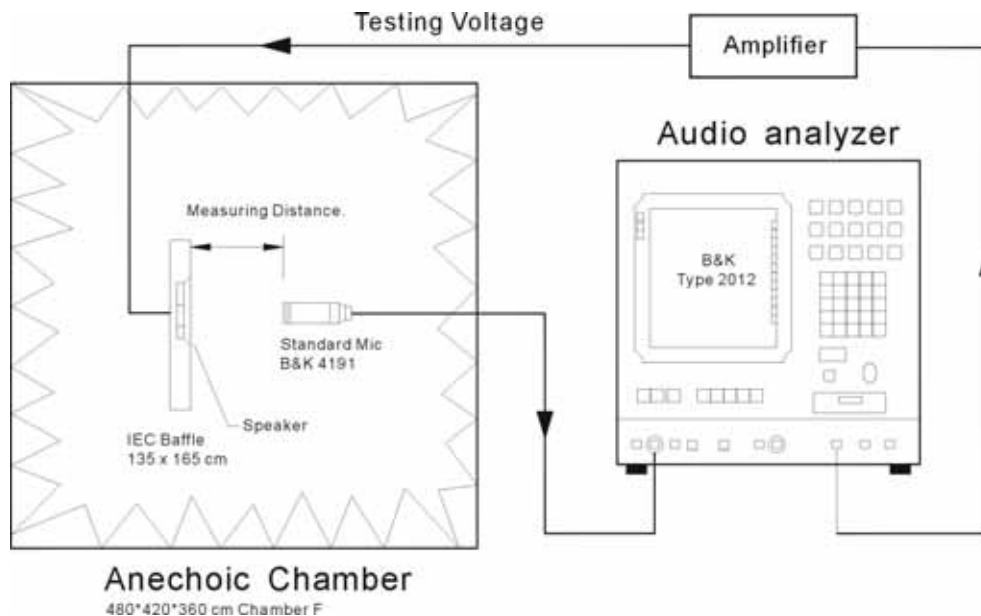

3. Environment & Mechanical test:

3.1 High Temperature: GB2423.2-81


After exposure the speaker in the $+ 60 \pm 2$ °C chamber for 96 hours, then leave the speaker at room temperature for 1 hour, the SPL should not deviate by ± 3 db, and resonant frequency should not deviate by ± 50 Hz, compare with pre-test measurement.

3.2 Low Temperature: GB2423.1-81

After exposure the speaker in the -25 ± 2 °C chamber for 96 hours, then leave the speaker at room temperature for 1 hour, the SPL should not deviate by ± 3 db, and resonant frequency should not deviate by ± 50 Hz, compare with pre-test measurement.

3.3 Temperature cycle: GB5170.18-87

After exposure the speaker in the chamber, temperature cycle setting as below shows, SPL should not deviate by ± 4 db, and resonant frequency should not deviate by ± 80 Hz, compare with pre-test measurement.

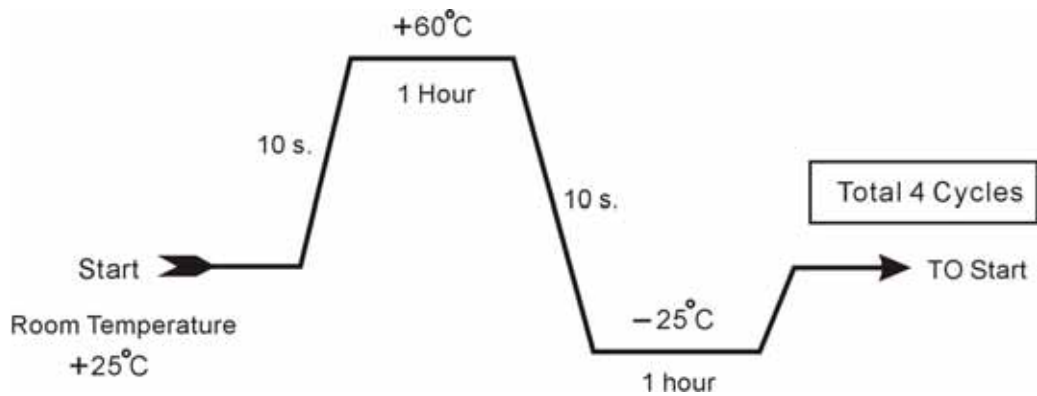

3.4 Humidity: GB5170.18-87

After exposure the speaker in the $+40 \pm 2$ °C, relative humidity 90% ~ 95% chamber for 96 hours, then leave the speaker at room temperature for 6 hours, the SPL should not deviate by ± 3 db, and resonant frequency should not deviate by ± 50 Hz, compare with pre-test measurement.

3.5 Vibration: GB11606.8-89

Frequency 30 ± 15 Hz, Amplitude 1.5 mm for 3 Hours. After test, SPL shall not deviate by ± 3 db from pre-test measurement,

3.6 Load test: GB/T 9396-1996


Speaker should not fail after apply 20 ~ 20K Hz white noise rated power input (RMS), 96 hours. After test, SPL shall not deviate by ± 3 db from pre-test measurement,

3.7 Drop test: GB2423. 8-81

75 cm free falling on concrete floor, 10 times. After test, SPL shall not deviate by ± 3 db from pre-test measurement,

4. Mounting **precaution**

In order to keep speaker work normally, there shall leave enough free space for diaphragm moving, minimum distance required is marked in speaker mechanical drawing.

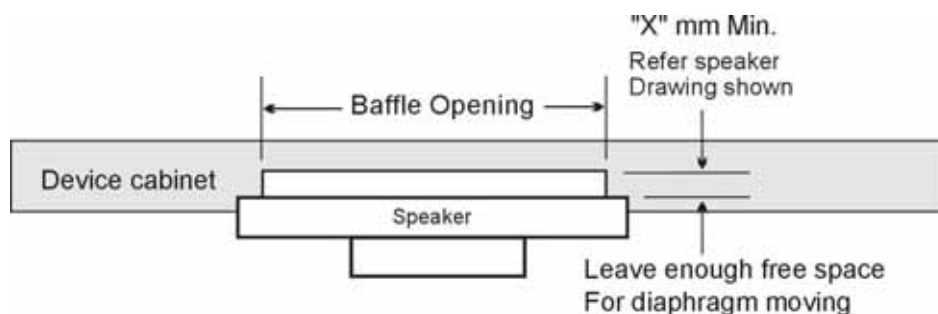

5. Measuring & standard referenced

Abstract from GB/T 9396-1996 and IEC 268-5:1989 methods of measurement for main characteristics of loud speakers.

5.1 Maximum input voltage

Maximum input voltage is in the shortest time. The speaker can bear simulation signal, that persist time is 1 second, interval 60 seconds, repeated 60 times, but the speaker wouldn't be damaged externally. The maximum signal voltage is the maximum input voltage in/the shortest time.

5.2 Rated sine voltage.

It is stipulated by manufacturer, sine signal voltage that make speaker work continuously in rated frequency range, but the speaker wouldn't be damaged heartily or mechanically. The persist time of the voltage is 1 hour.

5.3 The shortest time maximum power.

It is corresponding with the shortest time maximum input voltage, its definition is U_{st}^2/R , U_{st} indicates the shortest input power, R indicates the rated impedance.

5.4 The long time maximum power.

The long time maximum power is corresponding with the long time maximum input voltage, Its definition is U_{lt}^2/R , U_{lt} indicates the long time maximum input voltage, R indicates the rated impedance.

5.4 The rated sine power.


The rated sine power is corresponding with the rated sine voltage, its definition is U_s^2/R , U_s indicates the maximum sin voltage, R indicates the rated impedance.

5.5 The rated noise power.

The rated noise power is corresponding with the rated noise voltage, its definition is U_n^2/R , U_n indicates the rated noise voltage, R indicates the rated impedance.

P40KLS08 VOL:2.83V(1W) DIS:0.5M VANSOONIC

Magn dB re 20.0 uPa. [MECO Vanson Chamber F]

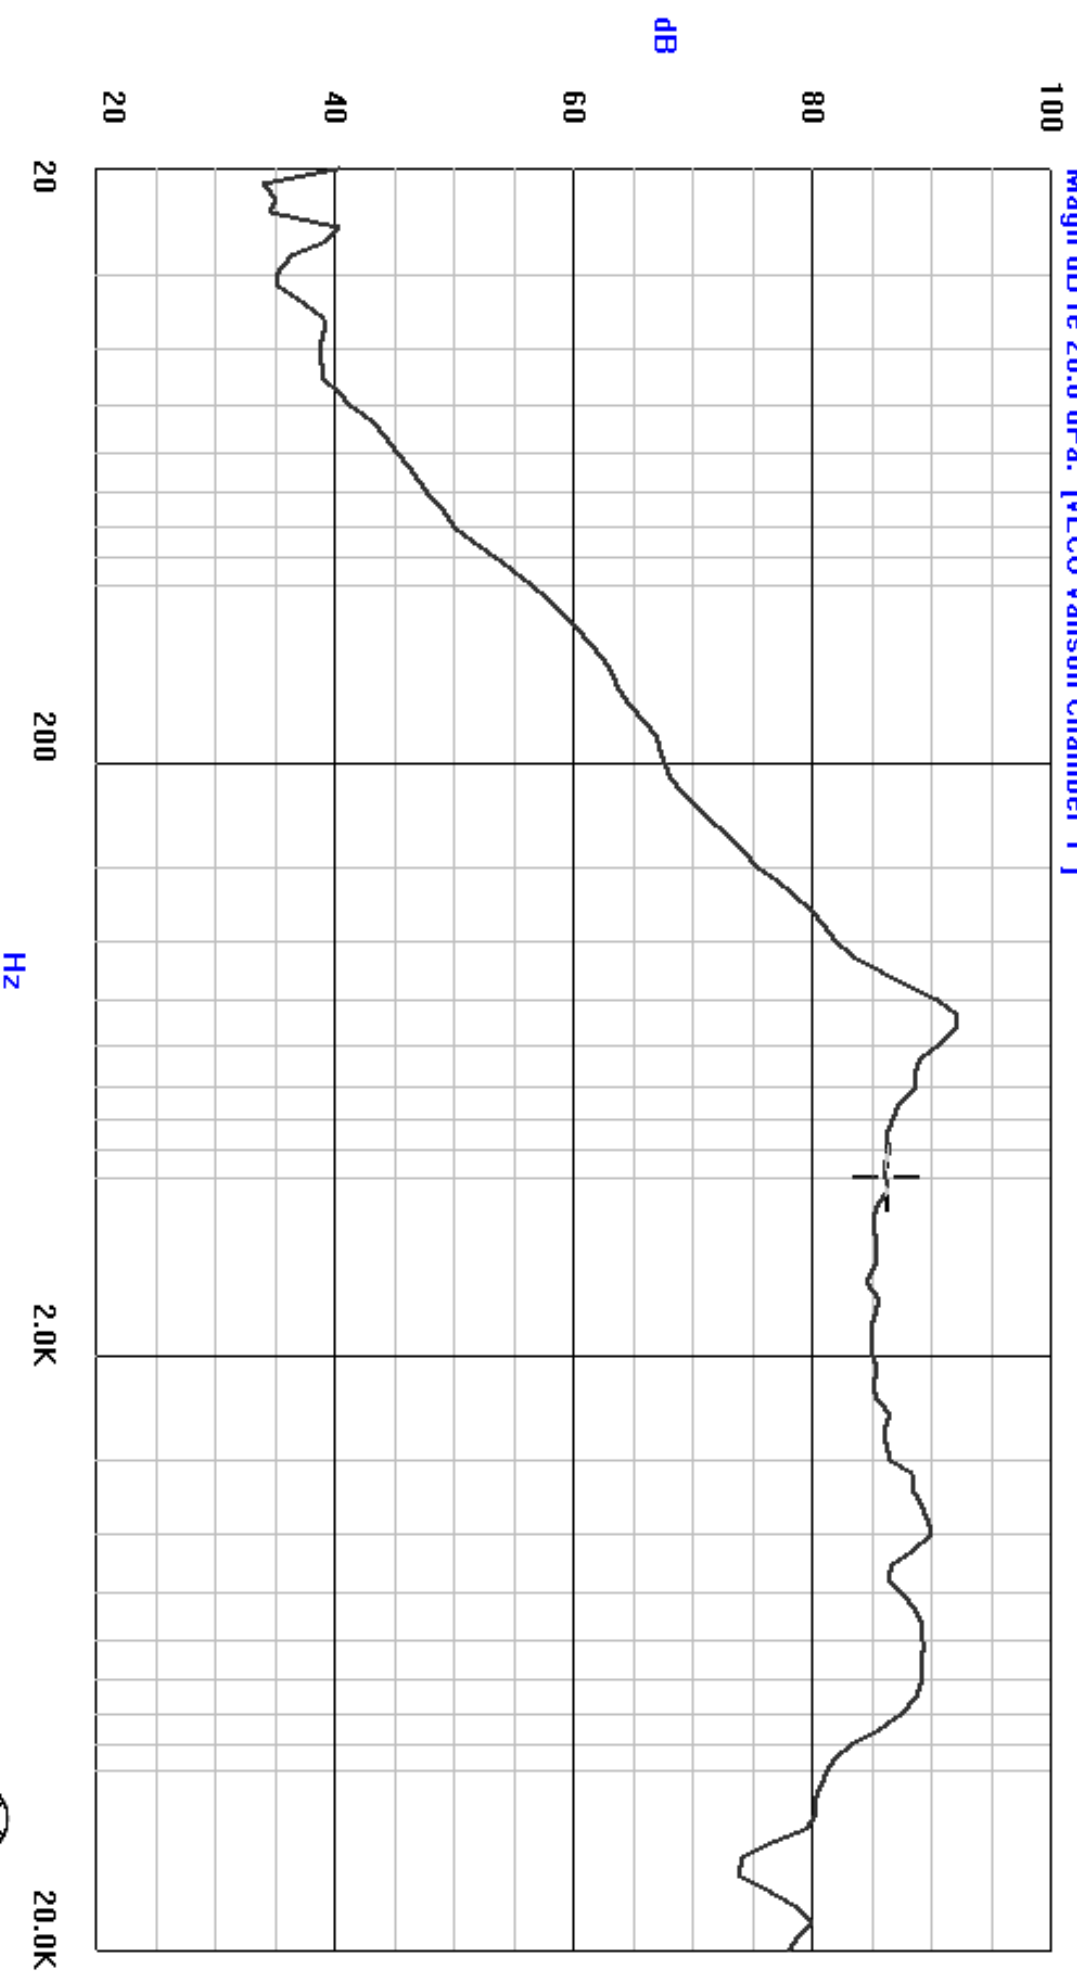

Current Curve: 0 X: 1000 Hz Y: 86.09 dB


Time(Y/M/D H:M:S): 2005/ 9/13 2: 9:52



不准使用鎳利
電子禁止使用的
環境管理物質

MOUNTING NOTICE

AT LEAST
0.8 mm
FOR
DIAPHRAGM
MOVING

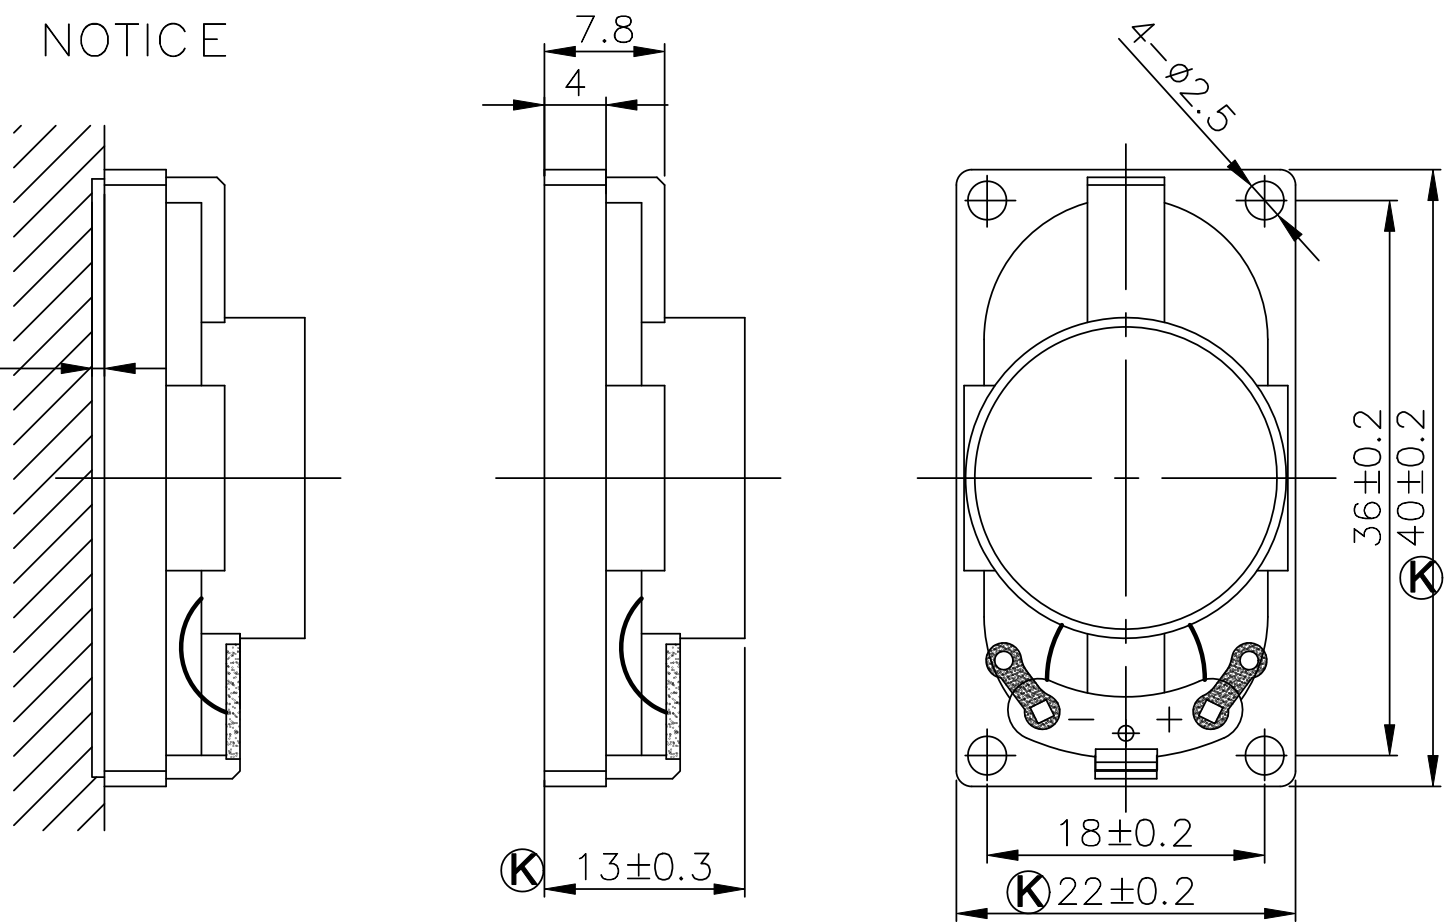

RANGE	TOL	✓			
0-8	±0.05	±0.1	±0.15	±0.2	±1
8-16	±0.1	±0.15	±0.2	±0.2	±2
16-24	±0.15	±0.2	±0.3	±0.3	±2
24-50	±0.2	±0.25	±0.3	±0.4	±3
50-100	±0.25	±0.3	±0.5	±0.5	±3
>100	±0.3	±0.4	±0.4	±0.8	±5

Ⓚ CRITICAL DIMENSIONS ENVIRONMENT REQUIREMENT:HF
CUSTOMER PN: VECO PN:
DATE: 2023/06/12 MATERIAL: COLOUR:

Vanson Electronics (Nanhai) Co., Ltd.
鎳利電子 E-MAIL: fsveco@veco.com.cn
TEL:+86-757-81266388 FAX:+86-757-81266389

Title: P40KLS08

Unit: mm	VER: 00	Appr.:	
	Scale: 1:1	CHK.:	Dwg.: 王麗紅