





REV	CONTENT	CHK	DATE
V0.0	CONTENT	CXL	20.05.11

Electrical :





- | | | |
|--|------------------|--------------------|
| | UL | IEC |
| 1.Rated Voltage : | 300V | 250V |
| 2.Rated Current : | 15A | 24A |
| 3.Torque Value : | M2.5 , 3.54Lb.in | M2.5 , 0.4N.m |
| 4.Wire Range: | 22-12AWG | 2.5mm ² |
| 5.Stripping Length : | 4-5mm | |
| 6.Withstanding Voltage : | AC2000V/1Min. | |
| 7.Operating Temperature : | -40 °C~+105 °C | |
| 8.RoHS Compliance | | |
| 9.Safty Approval : | cULus | |
| 10." ★ " is the key quality control point. | | |

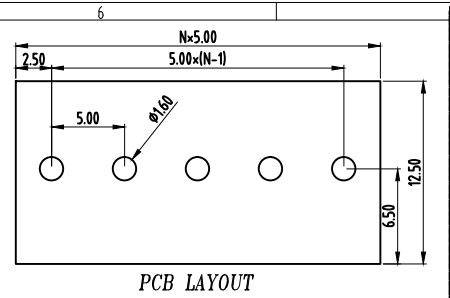

PCB LAYOUT

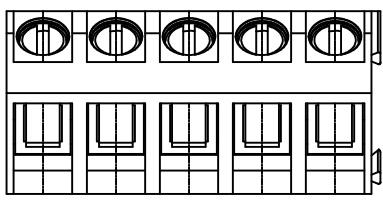

- ① Series No.
- ② Pitch
- ③ Poles
- ④ 1 Single Pitch
2 Double Pitch
- ⑤ Color: 1 Grey
2 Blue(Standard For AH)
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White
- ⑥ Customer Request : 00--Standard

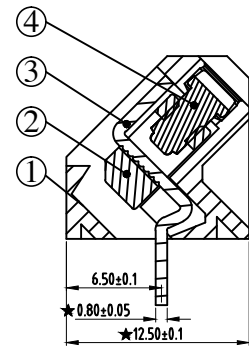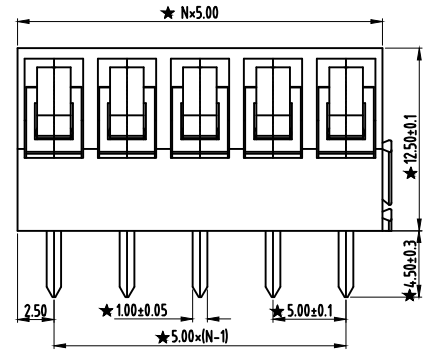

4	SCREW	XXXX	P	STEEL	Zn Plated
3	SOLDERPIN	XXXX	P	BRASS	Tin Plated
2	BLOCK	XXXX	P	BRASS	Ni Plated
1	HOUSING	XXXX	1	PA66 UL94V-0	SEN NOTE
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CXL	DATE	20.05.11	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.	DATE			SCALE	1:1
APP.	DATE			NAME	GT330-5.0-XXP-XX-00
				DWGNO.	XXXX

Total Pitch Tolerances in mm										Nominal dimension range in mm													
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	≡	≡	over	over
0	30	53	70	90	115	150	250	350	500	0	30	53	70	90	115	150	200	250	320	0	over	0	100
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.3	0.2	0.3