

Description

The Abracon ASDM series is a programmable MEMS oscillator, offered in various supply voltages. This series features low power consumption, a wide frequency range, excellent phase noise, tight stabilities, and short lead times for industrial, consumer, and other applications. The ASDM series comes in a 2.5 x 2.0 mm compact package with a CMOS output.



Features

- Low Power Consumption
- Exceptional Stability Over Temp. at -40 to +85°C
- Low Cost-Compact QFN Plastic Packaging
- Supply Voltage options: 1.8V, 2.5V, 2.8V, 3.0V, 3.3V
- Stand-by function
- [REACH/RoHS II Compliant | MSL Level 1](#)

Typical Applications

- CCD Clock for VTR Camera
- Equipment Connected to PCs
- Low Profile Equipment
- Computers and Peripherals
- Portable Electronics
- Consumer Electronics
- Vibrant, Shock-Prone & Humid Environments for Industrial Equipment

Key Electrical Specifications

Parameters		Min.	Typ.	Max.	Unit	Notes
Frequency Range:		1.0		150	MHz	
Operating Temperature:		0		+70	°C	See options
Storage Temperature:		-55		+150	°C	
Overall Frequency Stability ^[Note 1]		-50		+50	ppm	See options
Supply Voltage (Vdd):		+1.8V, 2.5V, 2.8V, 3.0V, or 3.3V			V	See options
Supply Current (no load):	1.0 to 39.9999MHz		7	15	mA	Vdd=3.3V No load RL=∞ T=25°C
	40.0 to 79.9999MHz		8	15		
	80.0 to 124.9999MHz		9	15		
	125.0 to 150MHz		10	15		
Output Voltage:	V _{OH}	0.8*V _{dd}			V	15pF
	V _{OL}			0.2*V _{dd}		
Rise Time:	Tr		1.3	3.0	ns	15pF; T=25°C 20%/80%*VDD
Fall Time:	Tf		1.3	3.0		
Output Load:		15pF max / 10kΩ min.			pF	
Symmetry:		45		55	%	@1/2Vdd
Startup Time:			1.5	3.0	ms	

Key Electrical Specifications


Parameters	Min.	Typ.	Max.	Units	Notes
Startup Time:		1.5	3.0	ms	
Disable Time:		20	100	ns	
Disable Stand-by Current:			15	uA	
Tri-state Function (Stand-by) :	"1" ($V_{IH} \geq 0.75 \cdot V_{DD}$) or Open: Oscillation			V	
	"0" ($V_{IL} < 0.25 \cdot V_{DD}$) : Hi Z				
Cycle to cycle jitter:		60		ps	F=100MHz
Aging:	-5.0		+5.0	ppm	First year @25°C

Note 1: Includes post reflow frequency accuracy, temperature stability, load pulling and power supply variation.


Absolute Maximum Ratings

Item	Min.	Max.	Units
Supply Voltage	-0.3	+4.0	V
Input Voltage	-0.3	V _{DD} +0.3	V
Junction Temp.		+150	°C
Storage Temp.	-55	+150	°C
Soldering Temp.		+260	°C
ESD			
HBM		2,000	V
MM		200	
CDM		500	


Options and Part Identification

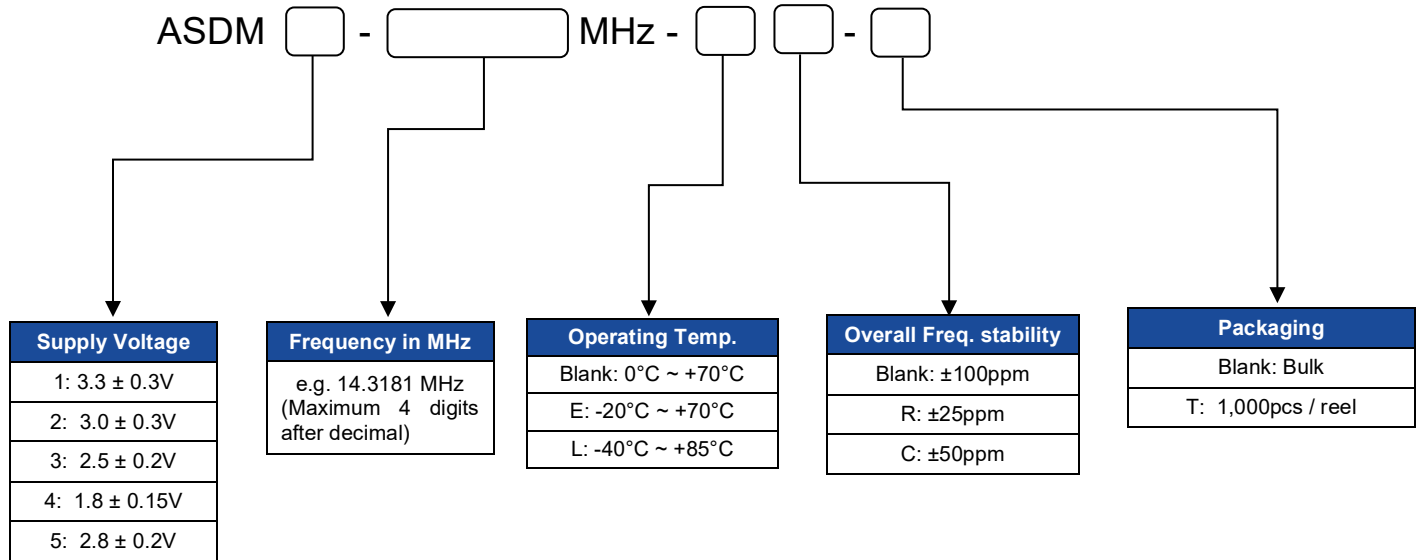

Mechanical Dimensions

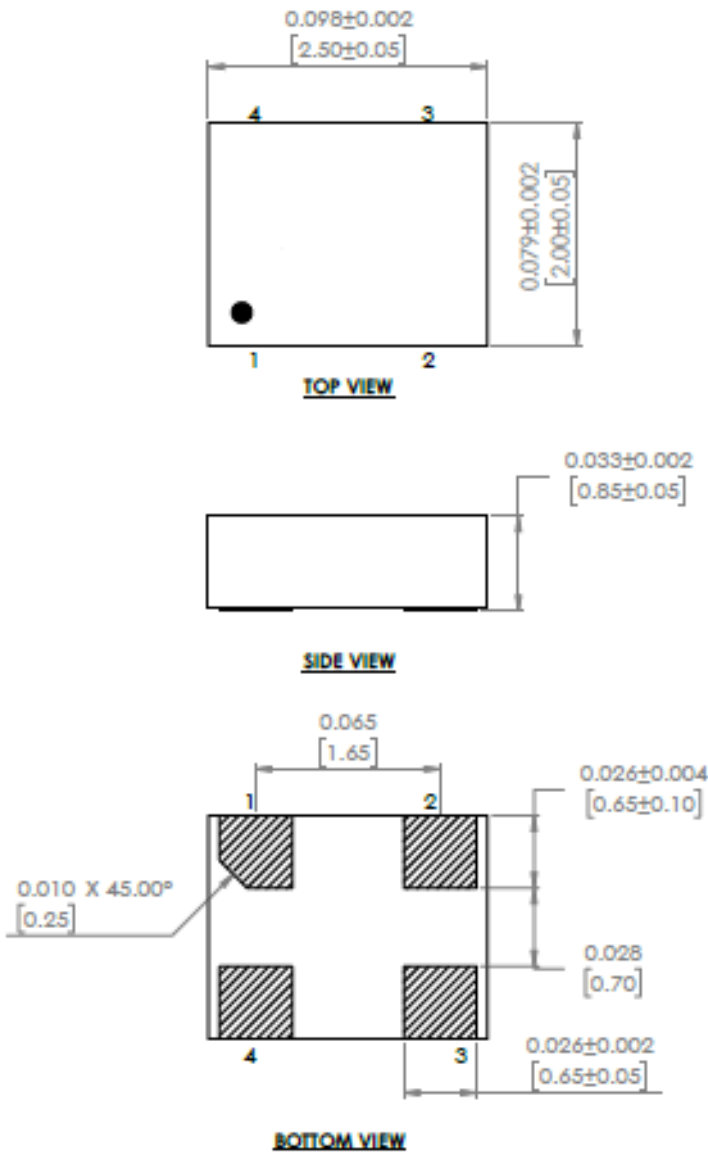

Recommended Land Pattern

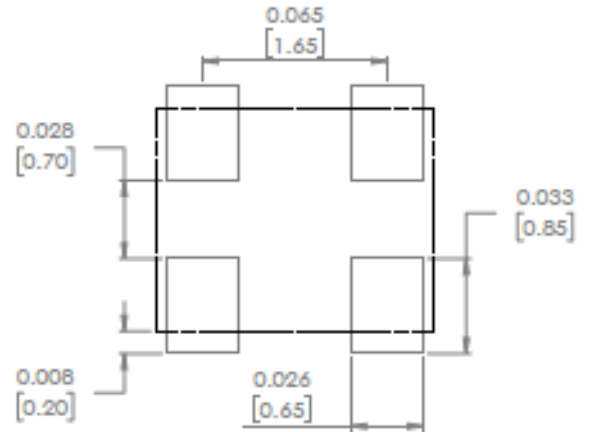

Pin#	Function
1	Standby
2	GND
3	Output
4	Vdd

Note: Recommend using 0.01uf bypass capacitor between PIN 2 and 4.

Dimensions: Inches[mm]

Reflow Profile [JEDEC J-STD-020]

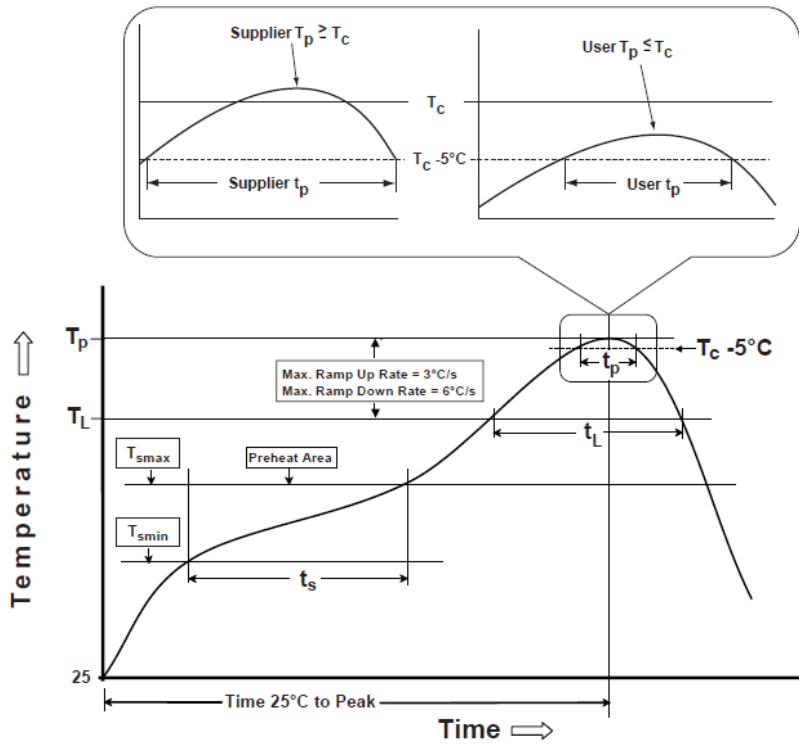


Table 1

SnPb Eutectic Process Classification Temperatures (T_c)		
Package Thickness	Volume mm^3 <350	Volume mm^3 \geq 350
<2.5 mm	235 °C	220 °C
\geq 2.5 mm	220 °C	220 °C

Table 2

Pb-Free Process Classification Temperatures (T_c)			
Package Thickness	Volume mm^3 <350	Volume mm^3 350-2000	Volume mm^3 >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 mm - 2.5 mm	260 °C	250 °C	245 °C
>2.5 mm	250 °C	245 °C	245 °C


Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Preheat / soak		
Temperature minimum (T_{smin})	100°C	150°C
Temperature maximum (T_{smax})	150°C	200°C
Time (T_{smin} to T_{smax}) (t_s)	60 - 120 sec.	60 - 120 sec.
Average ramp-up rate (T_{smax} to T_p)	3°C/sec. max	3°C/sec. max
Liquidous temperature (T_L)	183°C	217°C
Time at liquidous (t_L)	60 - 150 sec.	60 - 150 sec.
Peak package body temperature (T_p)*	see Table 1	see Table 2
Time (t_p)** within 5°C of the specified classification temperature (T_c)	20 sec.	30 sec.
Ramp-down rate (T_p to T_{smax})	6°C/sec. max	6°C/sec. max
Time 25°C to peak temperature	6 min. max	8 min. max
Reflow cycles	2 max	2 max

*Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

**Tolerance for time at peak profile temperature (t_p) is defined as supplier minimum and a user maximum.

Packaging


T= 1,000pcs/reel (D=180mm)

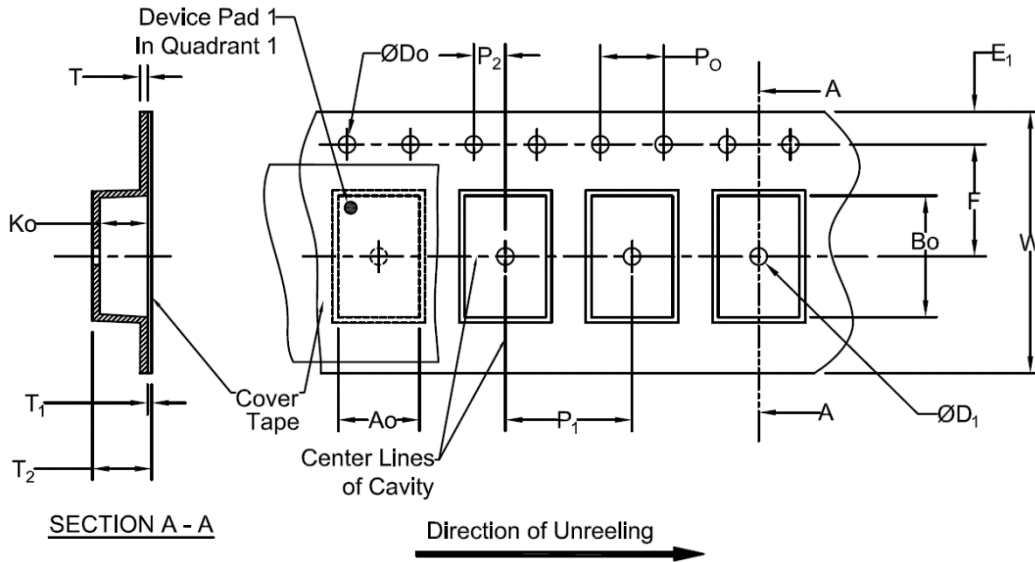

Tape Specifications (mm)							
Width	Ao	Bo	Do	D ₁ (Min)	E ₁	F	Ko
8mm	*	*	1.5+0.1/-0.0	1.0	1.75±0.1	3.5±0.05	*
Width	P1	P2	P0	T (Max)	T1 (Max)	T2 (Max)	W (Max)
8mm	4.0±0.1	2.0±0.05	4.0±0.1	0.6	0.1	2.5	8.3

***Note: Compliant to EIA-481**

Dimensions: mm

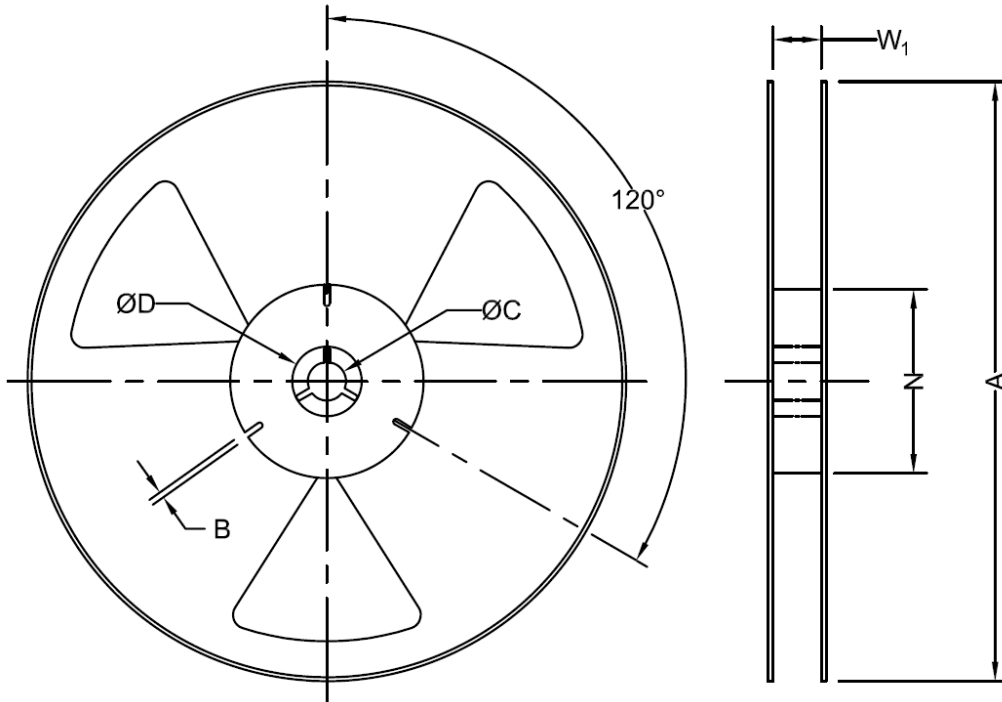

Reel Specifications (mm)							
Width	Qty/Reel	A (Nom)	B (Min)	C (Min)	D (Min)	N (Min)	*W ₁
8mm	1000	178	1.5	13.0+0.5/-0.2	20.2	50	8.4+1.5/-0.0

***Note: Measured at Hub**

Dimensions: mm

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ABRACON:](#)

[ASDM1-MEMS BLANK OSCILLATOR](#) [ASDM4-28.636MHZ-LC-T](#) [ASDM4-12.000MHZ-LC-T](#) [ASDM-Adapter Socket](#)
[2.5 X 2.0](#) [ASDM-BLANK-LC](#) [ASDM1-64.000MHZ-LC-T](#)