


Optocoupler-UDK-PLC-O
48Vdc-317005

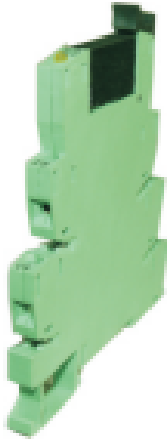


Optocoupler, input voltage: 48V, input current: 9mA , connection methods: screw connection, pollution degree: 2, AWG: 26-14, output current:0~3A, width80mm, thickness6.2mm, color: grey, mounting rail: TH35.

Product parameter

Parameter	Data
Packing unit(pcs)	/
NW per piece(g)	/
Cross section(mm ²)	0.14-2.5
Color	grey
Materials	PA66
Flame retardant rating	V0
Voltage input(V)	12V
Current input(mA)	9
Insulation material temperature	-40 ~ +125
Connection methods	screw connection

Product certification

Parameter	Data
Certification logo	

Technical data

Parameter	Data

Parameter	Data
Connection methods	screw connection
Output current (A)	0~3A
Output Voltage(V)	5-24V
Rated impulse voltage	4KV
Turn-on time	100us
Turn-off time	100us
Voltage drop at max. load	1
Ambient temperature ()	-25 ~ +40
Storage temperature (Storage/transportation) ()	-30 ~ +80
Relative humidity	5% ~ 85%
Connection in acc. with standard	IEC 60947-5-1
Pollution degree	2

Dimension

Parameter	Data
Width(mm)	80
Thickness(mm)	6.2
Height(mm)	94